

TAMKO® TWM-I MASTIC

Rubberized Bitumen Mastic

PRODUCT DATA

DESCRIPTION

TAMKO® TWM-1 is a high quality, trowel grade, rubberized bitumen mastic that dries to a strong but pliable seal allowing for minor expansion and contraction.

USES

TAMKO TWM-1 has multiple uses including, finishing the edge of seams, overlaps, patches and terminations of the properly sealed TAMKO Waterproofing Membrane. This product is also suitable for use in roof flashing applications and contains additives for use in wet and dry conditions.

APPLICATION

Apply with a trowel or caulking gun. When applied with a caulking gun, the bead should be troweled to a thickness of 1/8" and a width of 1/2" to 1" and worked into all terminations.

COVERAGE RATES

Side laps: 900 lineal feet per gallon
End laps: 600 lineal feet per gallon


LIMITATIONS

TWM-1 Mastic is not suitable for use as a waterproofing concrete/masonry sealer. When used to terminate the edges of the TAMKO Waterproofing Membrane, the use of TWM-1 Mastic is not a substitute for the seal of the waterproofing membrane itself.

TYPICAL PHYSICAL PROPERTIES*

Color	Black
Weight	10.7 lbs per gallon
Viscosity, Brookfield (36 @ 20 rpm)	<4000 poise
VOC	280 grams per liter
Flash Point (COC)	>100° F
Packaging	3 gallon pails, 29 or 10.5 ounce tubes

*All values stated as nominal at time of manufacture.

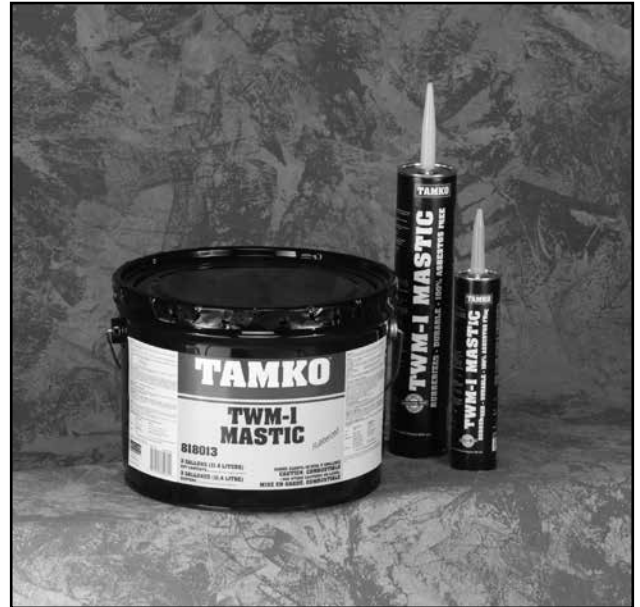

CAUTION: This product contains crystalline silica. Crystalline silica has been classified as a "known" human carcinogen by the International Agency for Research on Cancer (IARC) and the National Toxicology Program. This product also contains cutback asphalt. IARC has classified "extracts of steam and air-refined bitumens" (cutback asphalt) as "possibly carcinogenic to humans." The physical nature of this product may help limit any inhalation or dermal hazard during application and/or removal. However, physical forces such as sawing, grinding or drilling during demolition work and heating or burning may increase the inhalation or dermal exposure hazard of this product. Take precautions to prevent breathing fumes and contact with skin.

Information included in this product data sheet was current at time of printing. To obtain a copy of the most current version of this product data sheet, visit us online at tamko.com or call us at 800-641-4691.

This product is covered by a 5-year limited warranty. For information regarding or a copy of TAMKO's limited warranty, contact your local TAMKO representative, visit us online at tamko.com, or call us at 800-641-4691.

©2014 TAMKO Building Products, Inc. TAMKO® is a registered trademark of TAMKO Building Products, Inc.

tamko.com

Corporate	220 West 4th Street, Joplin, Missouri 64801	800-641-4691
Central District	220 West 4th Street, Joplin, Missouri 64801	800-641-4691
Northeast District	4500 Tamko Drive, Frederick, Maryland 21701	800-368-2055
Southeast District	2300 35th Street, Tuscaloosa, Alabama 35401	800-228-2656
Southwest District	7910 South Central Expressway, Dallas, Texas 75216	800-443-1834
Western District	5300 East 43rd Avenue, Denver, Colorado 80216	800-530-8868

